

Basi di fissaggio / Fastening bases

CILINDRO <i>Cylinder</i>	MODELLO <i>Model</i>	A mm	B mm	G ₁ mm	H ₁ mm	L ₁ mm	H ₂ mm	D ₂ mm	Fig.
CISO45	FBCISO45	70	50	-	-	-	-	-	1
50	50	75	56.5	-	-	-	-	-	1
75	75	100	73.5	-	-	-	-	-	2
95	95	120	92	15	9	12	13.5	60	3
120	120	140	109.5	18	11	15	13.5	80	3
150	150	190	138	18	11	15	13.5	100	3

Fig. 1

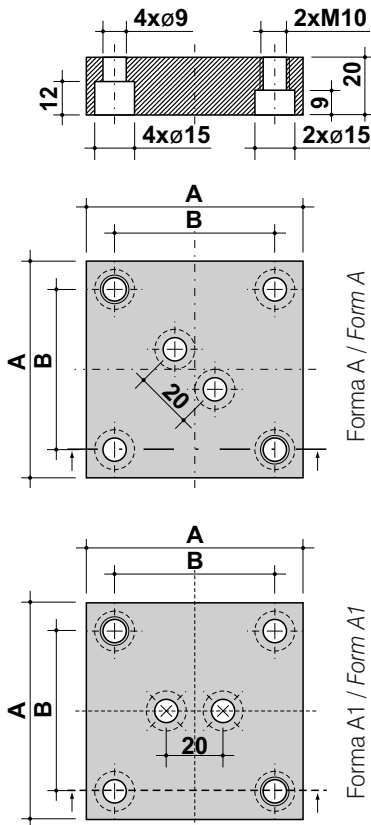


Fig. 2



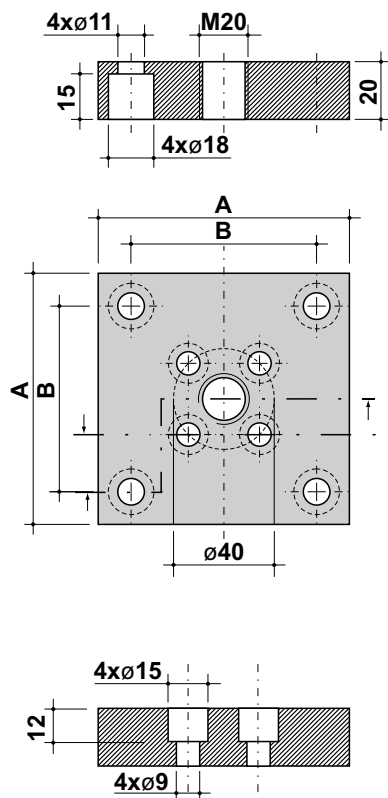


Fig. 3

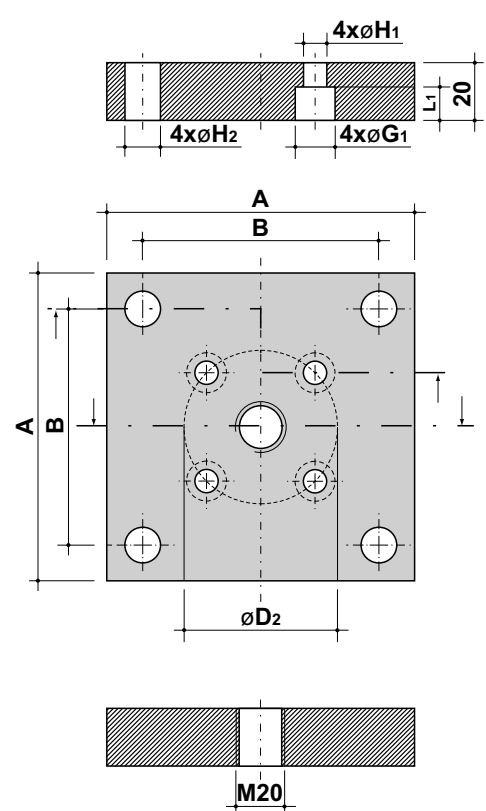


Accessori per lo scarico / Discharging device



M4

Modello / Model:
ADS-M4/1


TOP: Ø 12 ÷ 20
EG: 16



M4

Modello / Model:
ADS-M4/2


TOP: Ø 25-32
SM: Ø 25-32
EG: 24
CS: Ø 32



M6

Modello / Model:
ADS-M6


CSM: Ø 19 ÷ 32
MIC
CISO: Ø 19 ÷ 38
CS: Ø 19 - 25
SML: Ø 32
CVDI: Ø 19 - 25



M8

Modello / Model:
ADS-M8

Per tutti i cilindri
non citati altrove
For any other cylinder



M10

Modello / Model:
ADS-M10


SML: Ø 50



M12

Modello / Model:
ADS-M12

SML: Ø 75



1/8 GAS

Modello / Model:
ADS-1/8

CISO: Ø 45 ÷ 150