



## CF

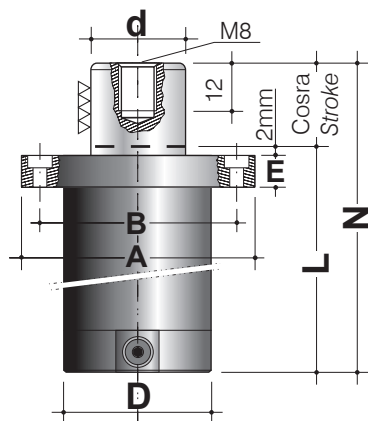

## C38...S

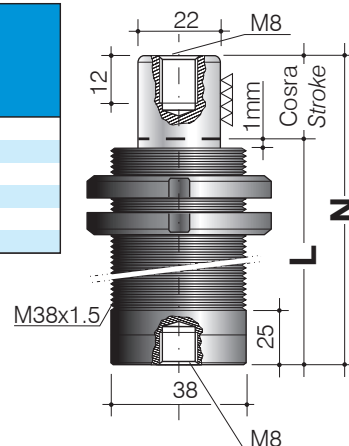

MODELLO Model	CORSA Stroke mm	L mm	N mm						
				bar	daN	daN	bar	daN	daN
<b>C38-10-S</b>	10	65	75						
<b>15-S</b>	15	70	85						
<b>25-S</b>	25	80	105						
<b>38-S</b>	38	93	131	131	500	800	197	NEW 750	1200
<b>50-S</b>	50	105	155						
<b>80-S</b>	80	140	220						

•Disponibili a richiesta •Available on request

Con ogni cilindro sono fornite due ghiera di fissaggio  
Two fastening rings are supplied with each cylinder

MODELLO Model	CORSA Stroke mm	L mm	N mm	D mm	d mm	A mm	B mm	E mm							Flange Flanges
									bar	daN	daN	bar	daN	daN	
<b>CF50-10</b>	10	95	105												
<b>25</b>	25	110	135												
<b>38</b>	38	123	161												
<b>50</b>	50	135	185												
<b>63</b>	63	148	211	50	30	100	75	25	141	1000	1600	212	NEW 1500	2400	
<b>80</b>	80	165	245												
<b>100</b>	100	195	295												
<b>125</b>	125	220	345												
<b>160</b>	160	255	415												
<b>200</b>	200	295	495												
<b>CF63-10</b>	10	95	105												
<b>25</b>	25	110	135												
<b>38</b>	38	123	161												
<b>50</b>	50	135	185												
<b>63</b>	63	148	211	63	36	125	100	25	147	1500	2400	196	NEW 2000	3200	
<b>80</b>	80	165	245												
<b>100</b>	100	185	285												
<b>125</b>	125	220	345												
<b>160</b>	160	255	415												
<b>200</b>	200	295	495												
<b>CF75-10</b>	10	105	115												
<b>25</b>	25	120	145												
<b>38</b>	38	133	171												
<b>50</b>	50	145	195												
<b>63</b>	63	158	221	75	45	125	100	25	157	2500	4000	189	NEW 3000	4800	
<b>80</b>	80	175	255												
<b>100</b>	100	200	300												
<b>125</b>	125	225	350												
<b>160</b>	160	265	425												
<b>200</b>	200	310	510												
<b>CF95-25</b>	25	130	155												
<b>38</b>	38	143	181												
<b>50</b>	50	155	205												
<b>63</b>	63	168	231	95	58	145	120	25	151	4000	6400	189	NEW 5000	8000	
<b>80</b>	80	190	270												
<b>100</b>	100	210	310												
<b>125</b>	125	245	370												
<b>160</b>	160	280	440												
<b>200</b>	200	330	530												
<b>CF120-25</b>	25	140	165												
<b>38</b>	38	153	191												
<b>50</b>	50	165	215												
<b>63</b>	63	178	241	120	75	170	145	35	147	6500	10400	204	NEW 9000	14400	
<b>80</b>	80	195	275												
<b>100</b>	100	215	315												
<b>125</b>	125	250	375												
<b>160</b>	160	290	450												
<b>200</b>	200	340	540												

•Disponibili a richiesta •Available on request